


«The adaptation of rotating disc technology to airborne disinfection is the best kind of innovation: simple and effective.»

Presenting Micro Drop Technology, which uses centrifugal force to project perfectly calibrated liquid droplets (5 to 10 μm) into the target regions.

The brand new Phileas range automates the disinfection of any kind of surface, even the most inaccessible.»

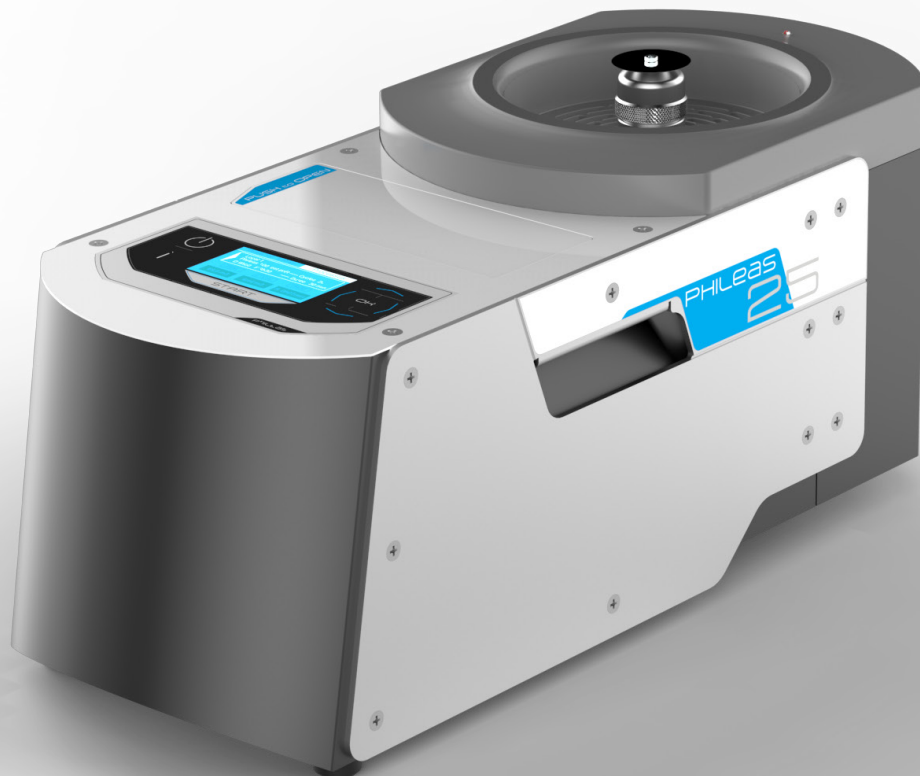

Phileas® 25
Robustness without the weight

Robustness without the Weight

Phileas®25 is an autonomous unit for the air-borne disinfection of surfaces, based on a centrifugation nebulizing system. Compact and robust, It has been tested against the 2009 (O2SAFE® and APASAFE®) or 2014 versions of the NFT 72-281 (O2SAFE®+ and PHILEASAFE®).

The solution to your risk management strategy

The inherent complexity of achieving disinfection in very small spaces requires the use of techniques that are both precise and effective in order to reach and eliminate all of the present microorganisms...)

These microorganisms could potentially be present on any surface (walls, racks, work surfaces), or even equipment or consumables.



Battery-powered (NiMh) operation and programming cycles, enabling optimized disinfection in complete autonomy.

Disinfection can be plotted and remotely controlled by tablet **MyPhileas®** (optional).

Procedures that are compatible with your organisation...

Phileas®25 can be pre-programmed, and runs without requiring the presence of an operator. You can easily et quickly program a diffusion for your team.

...and is very easy to get working...

True to its spirit of nomadic and simple implementation, **Phileas®25** moves easily to handle SAS and other small volumes thanks to robust handles.

It can be used on sector or NiMH battery.

It is designed especially for treating small volumes between 3m3 and 40m3.

...and ecological too !

The disinfectants O2SAFE®, O2SAFE®+, APASAFE® and PHILEASAFE® are free from adjuvants. The disinfection cycle ends in full degradation into free oxygen molecules and water, with no residue.

Characteristics	Overview of Device	Fields & Applications
Great performance with a NiMh battery that lasts for 2h30 of op. , Time battery charge: 6h, Minimum maintenance, Max. volume of treatment: 40 m3, Flow rate: 500 ml/h, Granulometry : 5 → 10 µm, Tank: 500 ml, Materials compatible with H2O2 , Compliant: CE	LCD Screen, Programming areas or equipment, Multi-Diffusion cycles, Security absence of liquid, Dimensions (L x l x h): 475 x 192 x 213 (mm), Weight: 5Kg	Fields Pharmaceutical, agri-food and cosmetic industries Laboratories, Biotechnology, Animals facilities Transports Applications Rooms, Airlocks, Cold rooms, Laboratories...

BY DEVEA
myphileas.com

DEVEAS SAS
12 rue de la Blanchardière — ZI de la Blanchardière
49300 Cholet France
Tel : 02 40 57 07 40 - Fax : 02 40 79 19 58
contact@devea-environnement.com
Website : myphileas.com

The different trademarks and the DEVEA brand are the property of DEVEA society..